



SMS-900

Sistema Stampa Etichette

Per messaggi grandi, importanti



Fino a 2,7 m di lunghezza


Molteplici colori

Alta visibilità

- Etichette manutenzione
- Salute e Sicurezza
- Barche e navi
- Macchine Movimento Terra
- Gestione Traffico
- Marchio Certificazione
- Etichette GHS & ADR
- Marcatura Veicoli
- Informazione Pubblica

SMS 900 – Sistema etichettatura in grandi formati

Progettato per produrre etichette grandi, lunghe e durevoli. La SMS 900 è un sistema solidamente costruito per ambienti industriali pesanti ad alti carichi di lavoro. Completo di software certificato Microsoft per la progettazione di etichette, segnali e cartelli con l'ausilio di una enorme libreria di simboli industriali. La SMS 900 ha una vasta gamma di materiali di alta visibilità e lunga durata. Molteplici colore sono facilmente creati utilizzando la nostra gamma etichette A4 e A5 fustellati prestampati.




Grandi Messaggi – Realizzati in casa, in pochi minuti e a colore



Maggiore impatto



Ampia gamma di materiali

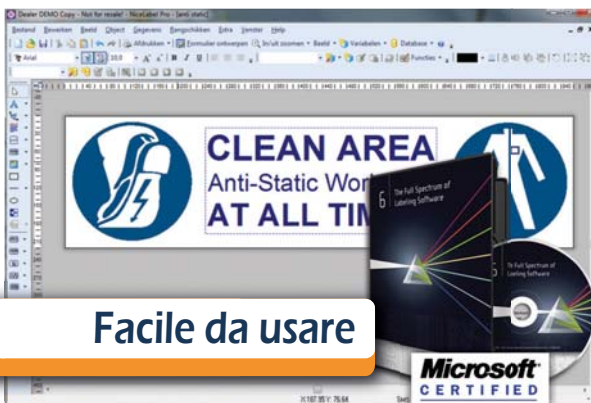

Facile da usare

ABB Saline Vess
Low Bar Risk No Back Was
VFM - 1000 QRS XX

**No climbing
in Windturbine**
RISK OF DEATH!

Safety Harness Instructions
Read and understand these instructions before using the equipment!

How To Put The Harness On
Pick up at rear D-ring and ensure that straps are not twisted. Place arms through shoulder straps (1). Fasten Chest strap (2) and adjust until shoulder straps are pulled to vertical. Adjust position of rear D-ring plate (3) using straps (4) so that D-ring is central between shoulder blades. Draw leg straps (5) between legs and thread buckles (6) pulling and strap to tighten snugly around thigh. Secure all knee straps on holders provided.

If Used To Arrest A Fall, Harness Must Be Withdrawn From Service

EXIT TO MINE SERVICE SHAFT
TURN SERVICE LOCK A FULL 360 DE
TO DEACTIVATE DOOR SEALS
Call 099 455 366

**ALL PAPER
SHIPPING
PACKAGING
HERE**

SUPER HEAVY
HEAVY LIFT CONTRACTOR
Graystone White and Sparrow

Air Conditioning Control Panel

WARNING
Ensure AC Condensers are reset
before enabling AC switches.
Failure Reporting: Tel: 4556

Chromium Acid 5%
02B1-RB-R023B

RB, R25, R43, R49, R50/53
Some are the opinion of flammable substances
(toxic if swallowed)
May cause sensitization by skin contact
May cause cancer by inhalation
Very toxic to aquatic organisms, may cause long-term damaging effects
in the aquatic environment
S45, S53, S60, S61
In case of accident or if you feel unwell, seek medical advice immediately
(show the label where possible)
Avoid exposure - obtain special instructions before use
This material and its container dispose as hazardous waste

WARNING!

**Do not start the hydraulics
with the drive brake off.
Risk of permanent damage.**

Flow

HIGH TEMPERATURE STEAM
EXTREME CAUTION
Line isolated by closing valves 12/5 and 12/9

Segnaletica per la salute e sicurezza all'etichettatura di attrezzature pesanti, la SMS900 in grado di fornire soluzioni semplici e sofisticati. Ha più di 40 diversi materiali per ogni tipo di applicazione, tra cui: Fluorescente certificata in ambienti scuri, alta o bassa temperature, superfici oleose e difficile, resistente all'acqua salata, adesivi permanenti o removibili, resistenza chimica delicata o aggressiva di e molto altro...

The Full Spectrum of Labeling Software



REBO SYSTEMS
Mob: +39 347 2311992
Email: info@rebosystems.it
Internet: www.rebosystems.it